


Stratus ftServer 2700 System

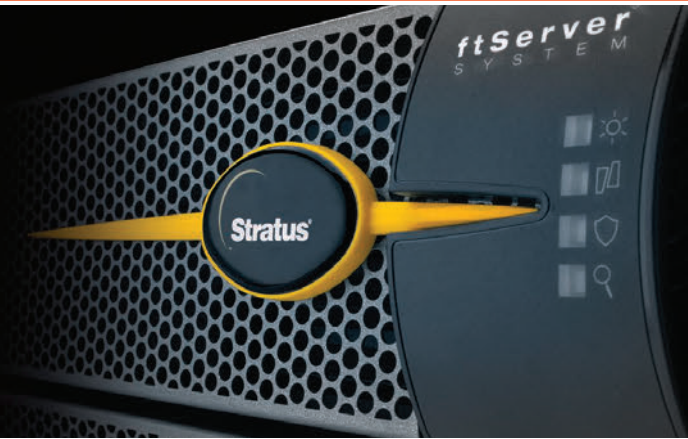

ftServer systems are for organizations with mission-critical applications that must always be protected against downtime and data loss.

The sixth generation Stratus® ftServer® 2700 system makes industry-leading 99.999% uptime highly affordable to purchase, quick to deploy, simple to manage, and cost-effective to own. The most economical fault-tolerant server on the market today, the 2700 model brings you a compelling new choice for your virtualization management console and other mission-critical applications. Priced below comparable cluster solutions, this server combines economic value with lights-out management. It's the ideal choice for volume deployment at remote locations — or as fault-tolerant replacements for ordinary, standalone servers.

Powered by the quad-core Intel® Xeon® processor and Intel QuickPath Architecture, the 2700 model features Microsoft® Windows Server®, Red Hat® Enterprise Linux®, and VMware® vSphere™ operating environments. Every Stratus 2700 system delivers Stratus uptime assurance technology at breakthrough value — thanks to a streamlined chassis design that takes full advantage of industry-standard components.

The 2700 model offers many integrated features packaged in a 4U configuration designed for rapid, effortless deployment in a standard rack. These new entry-level systems enable affordable rollouts at locations with limited IT support: remote offices, distribution hubs, branch banks, retail stores, power plants and other sites with no tolerance for downtime.

Uptime assurance features

Like other members of the industry-standard ftServer family, the 2700 model comes complete with uptime assurance features that eliminate operational complexity and high costs inherent in clusters or standby systems. Your enterprise gains superior uptime protection without having to modify applications — and without the need for failover scripting, repeated test procedures, or extra effort to make your applications cluster-aware.

Uptime. All the time.



Fault-tolerant ftServer systems protect mission-critical applications against downtime and data loss.

Lockstep hardware technology

Replicated, fault-tolerant hardware components process the same instructions at the same time. In the event of a component malfunction, processing doesn't miss a beat. The redundant component acts as an active spare that continues normal operations without system downtime or data loss. But that's just one of the major difference between ftServer systems and conventional servers.


The ftServer architecture separates PCI I/O from the rest of the motherboard and adds hardware logic in the form of custom Stratus chipsets. These chipsets provide the essential foundation for lockstep processing and the ability to detect, isolate, and withstand faults. Lockstep operation allows the ftServer system to isolate any hardware failure without any degradation in performance.

Automated Uptime layer

The Automated Uptime™ layer presents and manages the replicated ftServer components as a single system. This dramatically reduces complexity and operator error. Conventional technologies like clusters require you to synchronize state information between the nodes and between all the layers of multi-tiered applications such as the Web layer, middleware, and back-end database.

Working in concert with lockstep technology, the Automated Uptime layer prevents many errors from escalating into outages. Even in-memory data is constantly protected and maintained. Other issues are captured, analyzed, and reported to Stratus. This allows support personnel to take a proactive approach to correcting software problems before they recur.

Stratus uptime assurance keeps critical operations available all the time.

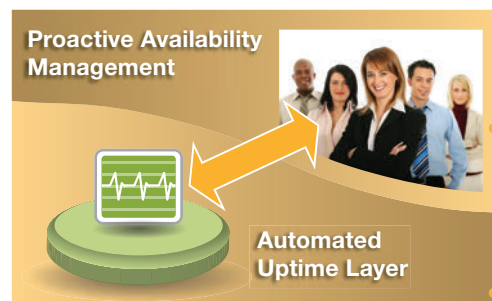

**24/7 monitoring:
people / practices**

**Detects, isolates,
and resolves issues
before they
cause downtime**

ftServer systems combine purpose-built fault-tolerant hardware, Automated Uptime Layer software, and proactive availability management services for complete uptime assurance.



**Lockstep hardware
withstands faults that
would cause other
servers to crash**



Uptime. **All the time.**

Stratus uptime assurance. Automatic availability that exceeds 99.999%.



Stratus provides a single source of accountability for complex inter-related platform, system software, and operating system support issues.

If needed, the ftServer system automatically orders the *correct* customer-replaceable part and resynchronizes upon installation. Stratus device driver hardening adds yet another level of reliability to the operating environment.

Proactive availability management

Stratus support technicians monitor your system over our secure global ActiveService™ Network (ASN). Leveraging information provided by the automated uptime layer, these experts are at the ready 24/7 to remotely diagnose and remediate more complex issues.

The Automated Uptime Layer reports a depth and frequency of diagnostic information that is unmatched in the industry. Authorized Stratus support engineers use this data to determine the root cause of issues related to the hardware or operating environment.

Remote support capabilities — made possible by the global Stratus ActiveService Network — enable our service engineers to diagnose, troubleshoot, and resolve problems online as if they were onsite.

Stratus' extensive online knowledgebase is a repository that tracks events across the entire installed base of systems. This enables us to identify and take remedial action on trends and defects before they pose problems. We also use this data to improve future product and service capabilities.

Stratus' uptime assurance features translate into tangible financial advantages that any business can appreciate: industry-leading uptime, plug-and-play deployment and simplified management and support.

Fault-tolerant ftScalable™ storage enables common storage management.

The ftScalable storage solution from Stratus packs innovative availability into an economical, scalable, 2U powerhouse. This high-performance, modular array addresses dedicated, shared and networked storage environments — allowing your to dynamically configure and grow your system as quickly as the needs of your business dictate.

Like other members of our ftServer product family, the fault-tolerant ftScalable solution is designed for continuous availability. Redundant

components, integrated automatic controller failover, and hot standby features combine with multi-path IO support to ensure maximum data integrity and protection.



Stratus ftScalable storage offers dynamic capacity expansion of up to three shelves.

Uptime. **All the time.**



Stratus ftServer 2700 Systems

The 2700 model brings industry-leading uptime and affordability together in a server that is ideal for volume deployment at remote locations.



ftServer 2700 system specifications

PROCESSORS

Logical processor	1-socket per customer replaceable unit (CRU)
Processor	Intel® Xeon® processor E5-2603, 1.8 GHz
Cores	4 (per processor)
L2 cache	10 MB (per processor)
Intel QPI speed	6.4 GT/s
Maximum memory bandwidth	34.1 GB/s

MEMORY

Min/max memory	4 GB/32 GB DDR3
DIMM slots	16 (8 per CRU)

I/O SUBSYSTEM

Integrated PCI adapter slots	4 PCI-Express (2 per CRU)
------------------------------	---------------------------

STORAGE SUBSYSTEM

Internal system drive bays	16 6Gb SAS 2.5" (8 per CRU)
Internal SAS disk drives supported	15K (146 GB, 300 GB); 7.2K (1 TB); 200 GB SLC SSD

ftSCALABLE STORAGE SUBSYSTEM

Expansion drive slots (RAID)	up to 72
RAID levels	0, 1, 3, 5, 6, 10, 50
Drive types	SFF SAS: SSD and HDD (15K, 7.2K RPM)

EMBEDDED I/O

10/100/1000 Ethernet ports	4 (2 per CRU)
10/100 Management Ethernet ports	2 (1 per CRU)
DVD-R/W	1
Serial (com) ports	2 (9-pin) ports per system
USB ports	4 (3 on rear, 1 on front per system)

MANAGEABILITY

Baseboard management controller	standard
Virtual Technician Module (VTM)	standard
Graphics adapter	1 VGA port per system
Optional modem	1 on rear panel

PCI ADAPTERS

1 Gigabit dual-port Ethernet	up to 4 optional (2 per CRU)
6Gb SAS 8-port host bus adapter for tape	up to 2 optional (non-redundant)
8Gb Fibre Channel for external storage	up to 4 optional (2 per CRU)

SERVICEABILITY

Hot-swappable components	CPU / I/O module, disks
--------------------------	-------------------------

OPERATING SYSTEM

Microsoft	Windows Server 2008 R2 with Hyper-V™ virtualization
Red Hat	Red Hat Enterprise Linux 6
VMware	vSphere 5.1

POWER AND PACKAGING

Input voltage	100-127, 200-240 VAC; 50 Hz, 60 Hz
System dimension (H x W x D)	7.0" (4U) x 17.5" x 30.1" with bezel
Weight (fully loaded including rails)	54.43 kg (120 lbs.)

Specifications and descriptions are summary in nature and subject to change without notice.

Stratus, ftServer, and the ftServer logo are registered trademarks and ActiveService, the Stratus Technologies logo, ftScalable, and the Stratus 24x7 logo, are trademarks of Stratus Technologies Bermuda Ltd. Microsoft, Windows Server, Hyper-V, and the Windows logo are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. The registered trademark Linux is used pursuant to a sublicense from the Linux Mark Institute, the exclusive licensee of Linus Torvalds, owner of the mark on a worldwide basis. Red Hat is a registered trademarks of Red Hat, Inc. in the United States and other countries. VMware and vSphere are trademarks or registered trademarks of VMware, Inc. Intel, the Intel logo, Xeon, and Xeon Inside are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. All other trademarks are the property of their respective owners.